


UNIT COOLER Catalog No. 118.4 SEPTEMBER, 1997



For general use above +34°F, reach-in and walk-in coolers. Heavy gauge, all Aluminum housing. **Russ-proof** core is standard for reach-ins. HI17-6 through HI17-25. Optional for all other models

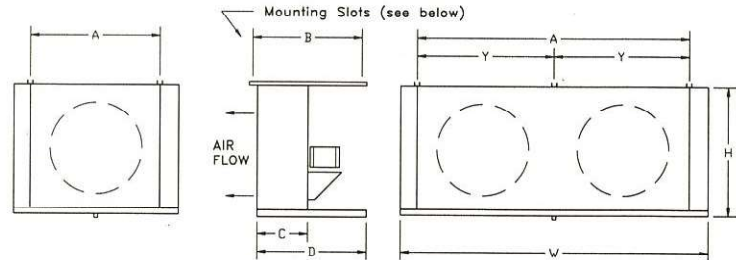

Mounting Slots HI17-6 through 25 have 3/8" width (Typical)
HI17-35 and up have 1/2" width

SPECIFICATIONS



MODEL	CAPACITY		CFM	FLA		FAN DIA.	QTY MOTORS	CONNECTIONS(in)			WT. LBS
	10°TD	15°TD		115V	230V			SUC.	LIQ.	DRAIN	
HI17-6	600	900	108	0.4	0.2	6	1	3/8 ODS	3/8 ODS	1/2 ODS	11
HI17-9	900	1350	160	0.4	0.2	8	1	3/8 ODS	3/8 ODS	1/2 ODS	12
HI17-12	1200	1800	216	0.4	0.2	8	1	3/8 ODS	3/8 ODS	1/2 ODS	13
HI17-15	1500	2250	270	0.6	0.3	8	1	3/8 ODS	3/8 ODS	1/2 ODS	15
HI17-18	1800	2700	325	0.6	0.3	10	1	1/2 ODS	1/2 ODS	1/2 ODS	21
HI17-25	2500	3750	450	0.6	0.3	10	1	1/2 ODS	1/2 ODS	1/2 ODS	24
HI17-35	3500	5250	490	1.7	.85	12	1	5/8 ODS	1/2 ODS	3/4 MPT	35
HI17-45	4500	6750	575	1.7	.85	12	1	5/8 ODS	1/2 ODS	3/4 MPT	41
HI18-55	5500	8250	795	1.7	.85	12	1	5/8 ODS	1/2 ODS	3/4 MPT	42
HI17-65	6500	9750	900	3.5	1.75	16	1	5/8 ODS	1/2 ODS	3/4 MPT	60
HI17-75	7500	11250	1040	3.5	1.75	16	1	5/8 ODS	1/2 ODS	3/4 MPT	80
HI17-85	8500	12750	1185	3.5	1.75	16	1	5/8 ODS	1/2 ODS	3/4 MPT	82
HI17-105*	10500	15750	1465	3.5	1.75	16	1	7/8 ODS	1/2 FN	3/4 MPT	89
HI17-120*	12000	18000	1700	5.9	2.9	16	1	7/8 ODS	1/2 FN	3/4 MPT	95
HI27-150*	15000	22500	2080	11.8	5.9	2-16	2	7/8 ODS	5/8 ODS	3/4 MPT	120
HI27-180*	18000	27000	2430	11.8	5.9	2-16	2	1-1/8 ODS	5/8 ODS	3/4 MPT	147

* Uses externally equalized thermostatic expansion valve.

DIMENSIONS (inches)

MODEL	W	D	H	A	B	C	Y	MOTOR
HI17-6	12	9-3/8	7	9-1/2	10	6-1/2	—	4W
HI17-9	12	9-3/8	9	9-1/2	10	6-1/2	—	4W
HI17-12	12	9-3/8	9	9-1/2	10	6-1/2	—	4W
HI17-15	12	9-3/8	9	9-1/2	10	6-1/2	—	9W
HI17-18	18	12-3/4	12	13-1/2	12-1/2	8-3/4	—	9W
HI17-25	18	12-3/4	12	13-1/2	12-1/2	8-3/4	—	9W
HI17-35	20	18-1/2	15-1/2	14	22	13	—	1/20HP
HI17-45	20	18-1/2	15-1/2	14	22	13	—	1/20HP
HI18-55	20	18-1/2	15-1/2	14	22	13	—	1/20HP
HI17-65	24	18-1/2	19-1/2	18	22	13	—	1/12HP
HI17-75	24	18-1/2	19-1/2	18	22	13	—	1/12HP
HI17-85	24	18-1/2	19-1/2	18	22	13	—	1/12HP
HI17-105*	30	18-1/2	22	23	22	13	—	1/12HP
HI17-120*	30	18-1/2	22	23	22	13	—	1/6HP
HI17-150*	48	18-1/2	22	41	22	13	20-1/2	(2) 1/12HP
HI27-180*	48	18-1/2	22	41	22	13	20-1/2	(2) 1/12HP