


## Mullion-Temp

Catalog No. 122.0

February 1994

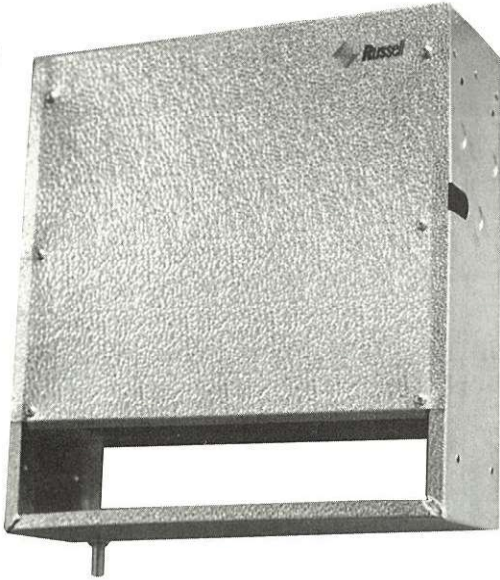

The Russell Mullion-Temp is specifically designed to fit behind mullion located between the under-counter reach-in doors. The Mullion-Temp is available in two air flow arrangements;

- The "MDF" arrangement is a downflow arrangement ideal for beverage coolers

- The "MUF" arrangement is an upflow arrangement which allows the air to be directed towards the drop-in food trays to help maintain a desired tray temperature.

The finned coils of the MDF and MUF models are provided with Russ-Proof corrosion protection.

### Specifications

MODEL NUMBER	CAPACITY (Btu/hr)		CFM	MOTOR			CONNECTIONS (in.)			DIMENSIONS (in.)			APPROX. SHIP WT. (lbs)
	10 DEG. TD	15 DEG. TD		QTY	AMPS 115/1	AMPS 230/1	LIQUID	SUCTION	DRAIN	H	W	A	
27-13	1250	1875	200	2	1.5	0.8	1/2 F.N.	1/2 OD	5/8 OD	17-1/8	15-5/8	12-1/4	20
27-17	1700	2550	185	2	1.5	0.8	1/2 F.N.	1/2 OD	5/8 OD	17-1/8	15-5/8	12-1/4	22
37-23	2250	3375	280	3	2.2	1.1	1/2 F.N.	1/2 OD	5/8 OD	17-1/8	22	12-1/4	30

